


CAM EQUIPMENT

TELEPHONE: 01761 434226
 FAX No.: 01761 435541
 WEB SITE: WWW.CAMequipment.co.uk
 E-Mail: Enquiries@CAMequipment.co.uk



FROME HILL, RADSTOCK, Nr BATH, BA3 3PY

MANUFACTURERS OF QUALITY GARAGE & WORKSHOP EQUIPMENT SINCE 1972

FP & EP CLEANING TANKS

THE FP CLEANING TANKS FOR FAST, EFFICIENT CLEANING OF PARTS COMPONENTS AND SUB ASSEMBLIES.

Simplicity itself to operate, this cleaning tank enables a number of articles to be cleaned.

CAM Cleaning Tank Complete with slide back lid giving a LARGE cleaning area.

F.P.1 and F.P.2 Models

Simplicity itself to operate. The F.P.1 and F.P.2 SERVICE CLEANING TANK are designed to provide ease of use and economy of cleaning fluid. A semi-rotary force pump operated by foot pedal maintains a constant spray and laborious job is carried out quickly and thoroughly.

Lid is slid back revealing a large un-obscured area with the lid folded back it doubles as a splash back preventing wastage. F.P.1 and F.P.2 models require no mains power supply, without the requirement of a power supply they can be used in the field or in areas with no power available.

Castors are fitted at one end of the cleaning tank for ease of movement or relocation. All tanks are made from heavy duty mild-steel construction.

Special size and Stainless steel tanks can be manufactured on request.

E.P.1 and E.P.2 Models

Fitted with a high quality 240 Volt, 50 Hz single Phase, electric motor / pump to give a constant flow of cleaning fluid at approx. 40 psi, the motor is controlled by a foot operated switch at the base of the cleaning tank, motor / pump will only operated when the foot switch is pressed.

CLEANING FLUID


Whilst there are many cleaning fluids, in addition to plain paraffin, which may be suitable for our range of tanks, acid and strong alkaline solutions should not be used in these tanks because of their corrosive effects.

The use of all cleaning fluids must be in accordance with the manufactures instructions.

C.A.M CLEANING TANK MODEL E.P.2

CE marked.

Convenient working height.

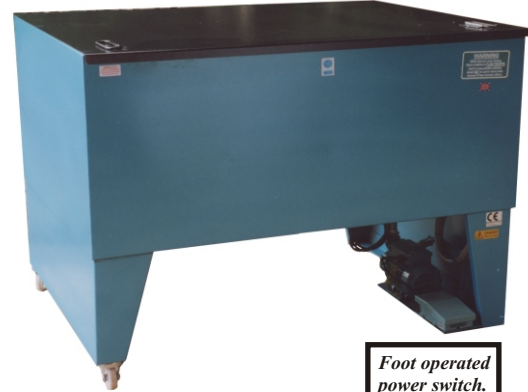

Foot operated power switch.

Castors fitted at one end for ease of movement.

Slide back lid ensures easy loading.



Large un-obscured working area.

Made in the UK.

F.P Cleaning Tanks not illustrated.

SPECIFICATION

External Dimensions	F.P.1	F.P.2	E.P.1	E.P.2
Length of Tank	915 mm	1220 mm	915 mm	1220 mm
Width of Tank	610 mm	915 mm	610 mm	915 mm
Working Height	830 mm	870 mm	830 mm	870 mm
Working Depth	380 mm	180 mm	380 mm	180 mm
Sump Capacity	50 Lt	100 Lt	50 Lt	100 Lt
Foot Operated	Yes	Yes	No	No